Isovara product sheet — customers

Oct 10, 2026

Know the moment something's wrong

Isovara watches your freezer, server closet, greenhouse or garage around the clock, and texts or emails you the moment something needs attention.

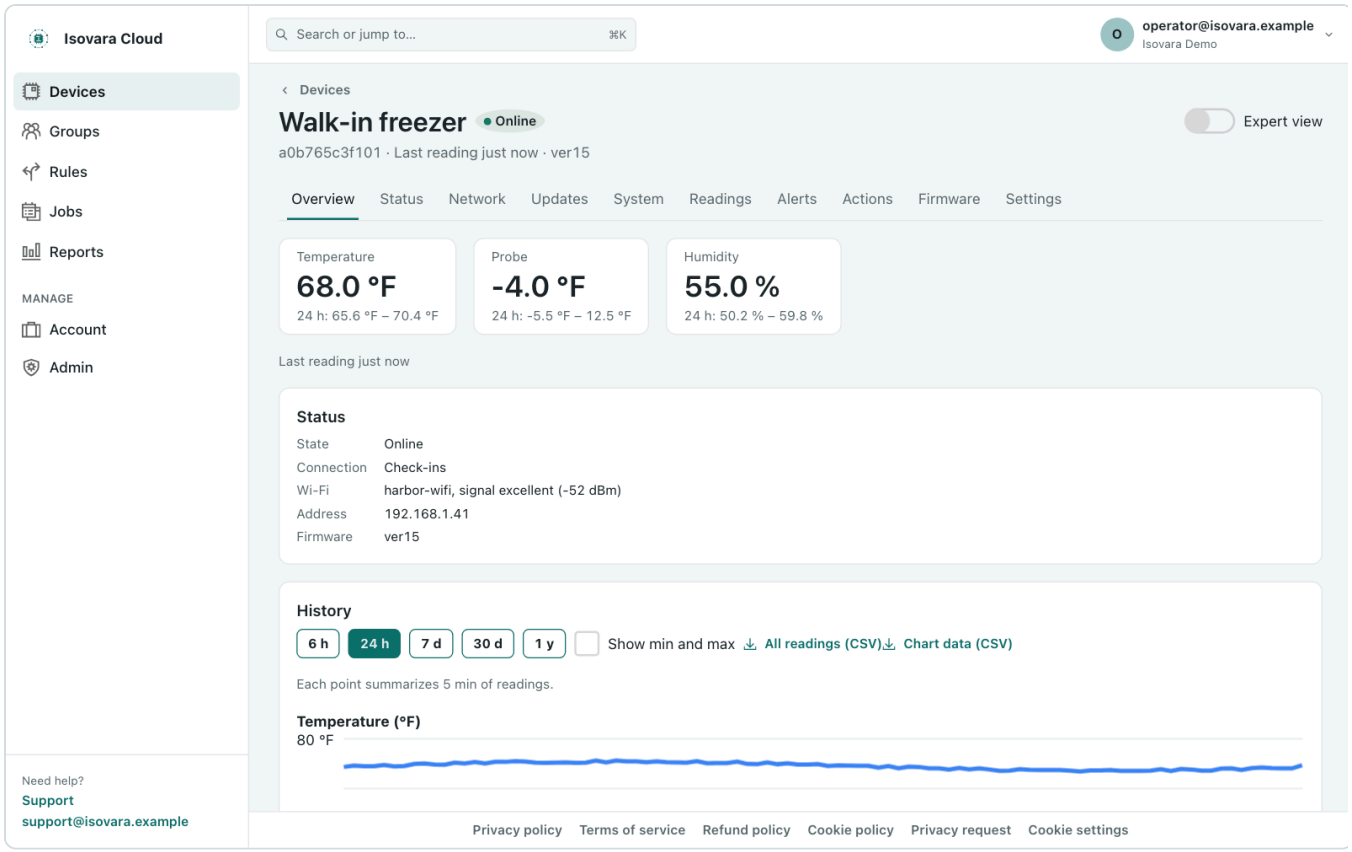
Operators: replace "Isovara" with your brand name throughout.

The monitor

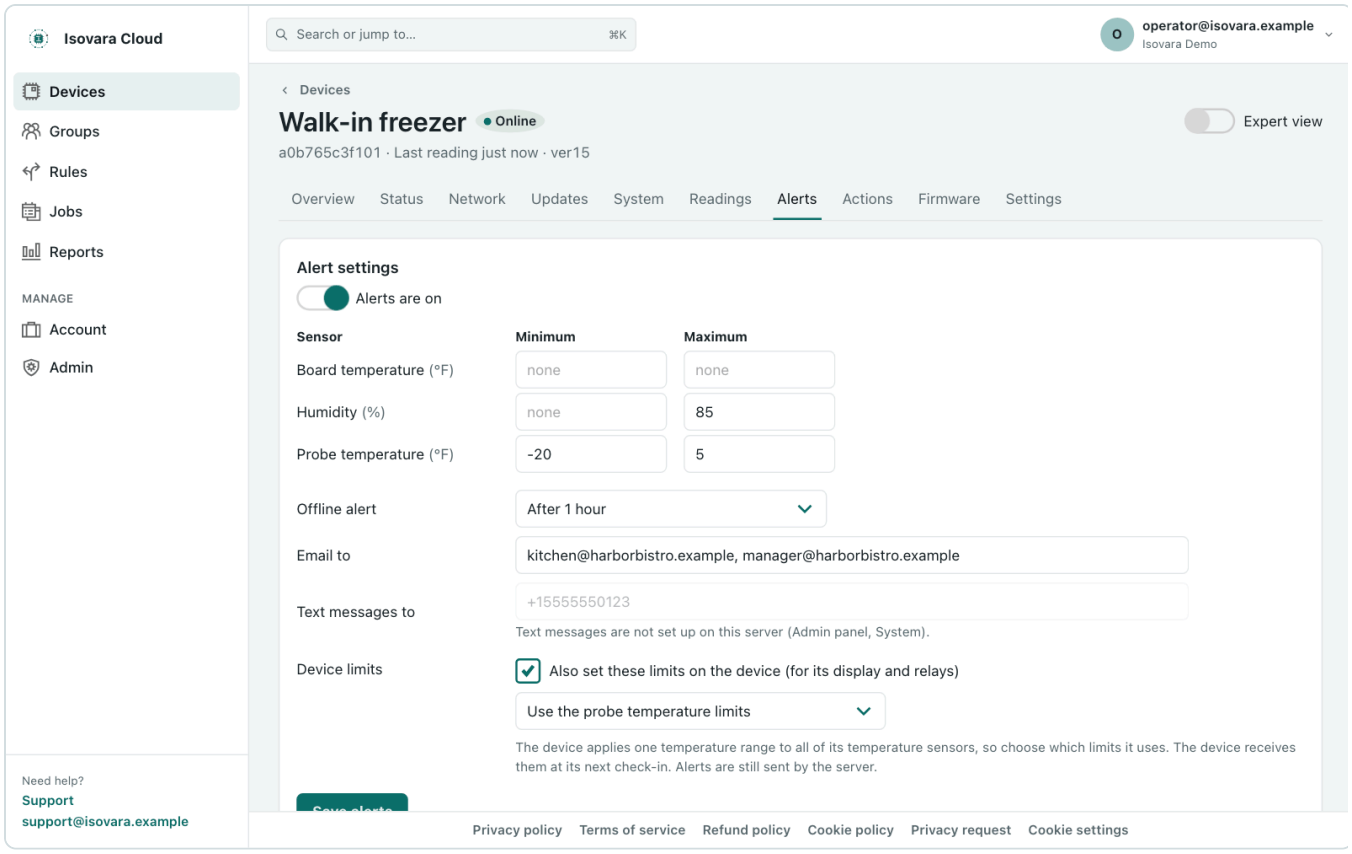
- **Watches temperature and humidity** out of the box, with options for pressure and a waterproof probe on a long cable for freezers and coolers.
- **Shows it at a glance** on a bright color screen, so anyone walking past can read it.
- **Knows about defrost.** A freezer warming up during its defrost cycle won't set off a false alarm.
- **Runs things for you.** Two built-in switches turn a heater, fan or cooler on and off at the temperature you choose, even if your internet goes down.
- **Opens your garage.** Garage door mode controls up to two doors and tells you when one is left open.
- **Sets up in minutes** over Wi-Fi, with the Manager app or any phone browser.
- **Stays up to date** with signed, verified updates delivered over the internet.

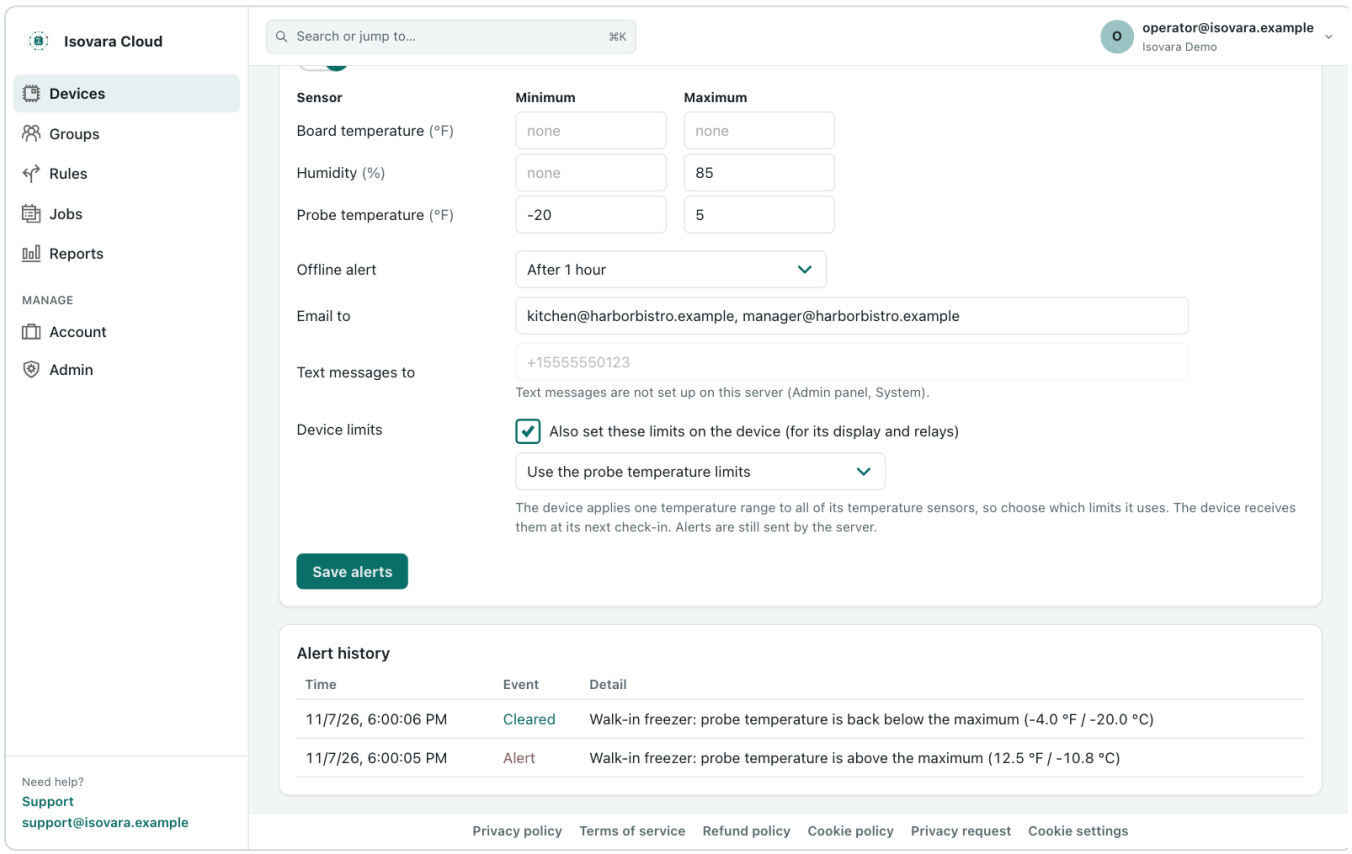
Your portal and app

Everything your monitors see is in one place, in any web browser.



- **Alerts your way.** Set a low and high limit for each sensor, and choose who gets a text or an email. You'll also hear if a monitor stops reporting.
- **Smart warnings.** Ready-made rules catch freezer thaw risk, a stuck defrost, a garage door open at night or weak Wi-Fi, and higher plans let you write your own.
- **History and charts.** See how temperatures moved overnight, or over the last two weeks; keep longer history on a plan that includes it.
- **Share without sharing passwords.** Invite family, a manager or a tenant as a viewer. They see your monitors but can't change anything.
- **Your units, your names.** Call them "Walk-in freezer" or "Cabin crawl space", and group them by site.
- **Your preferences.** °F or °C, 12- or 24-hour time, light or dark theme.
- **Manager app** for Android, Windows and Mac: find a monitor nearby over Bluetooth and set it up in a few taps.


Isovara Cloud
Search or jump to... ⌘K
operator@isovara.example
Isovara Demo
Devices
Groups
Rules
Jobs
Reports
MANAGE
Account
Admin
Devices
Walk-in freezer
Online
Expert view
a0b765c3f101 · Last reading just now · ver15
Overview
Status
Network
Updates
System
Readings
Alerts
Actions
Firmware
Settings
Alert settings
Alerts are on
Sensor
Minimum
Maximum
Board temperature (°F)
none
none
Humidity (%)
none
85
Probe temperature (°F)
-20
5
Offline alert
After 1 hour
Email to
kitchen@harborbistro.example, manager@harborbistro.example
Text messages to
+15555550123
Text messages are not set up on this server (Admin panel, System).
Device limits
Also set these limits on the device (for its display and relays)
Use the probe temperature limits
The device applies one temperature range to all of its temperature sensors, so choose which limits it uses. The device receives them at its next check-in. Alerts are still sent by the server.
Need help?
Support
support@isovara.example
Privacy policy
Terms of service
Refund policy
Cookie policy
Privacy request
Cookie settings


Isovara Cloud
Search or jump to... ⌘K
operator@isovara.example
Isovara Demo
Devices
Groups
Rules
Jobs
Reports
MANAGE
Account
Admin
Sensor
Minimum
Maximum
Board temperature (°F)
none
none
Humidity (%)
none
85
Probe temperature (°F)
-20
5
Offline alert
After 1 hour
Email to
kitchen@harborbistro.example, manager@harborbistro.example
Text messages to
+15555550123
Text messages are not set up on this server (Admin panel, System).
Device limits
Also set these limits on the device (for its display and relays)
Use the probe temperature limits
The device applies one temperature range to all of its temperature sensors, so choose which limits it uses. The device receives them at its next check-in. Alerts are still sent by the server.
Save alerts
Alert history
Time
Event
Detail
11/7/26, 6:00:06 PM
Cleared
Walk-in freezer: probe temperature is back below the maximum (-4.0 °F / -20.0 °C)
11/7/26, 6:00:05 PM
Alert
Walk-in freezer: probe temperature is above the maximum (12.5 °F / -10.8 °C)
Need help?
Support
support@isovara.example
Privacy policy
Terms of service
Refund policy
Cookie policy
Privacy request
Cookie settings

Plans and specifications

Pay a small monthly or yearly fee per monitor for the service you need; every monitor keeps two weeks of readings.

Operators: the tiers below are an example. Set your own names, features and prices in your portal.

	Basic	Pro	Business
Price per monitor	[$ / month]	[$ / month]	[$ / month]
Text and email alerts, offline alerts	Yes	Yes	Yes
Viewers	Up to 3	Up to 3	Up to 3
History	14 days	Long-term	Long-term
Status updates	Every 60 minutes	Every 15 minutes	Every 15 minutes
Your own rules and webhooks	—	Yes	Yes
API access	—	—	Yes

Specifications

Item	Detail
Measures	Temperature and humidity built in; pressure and waterproof probe optional
Range (built-in sensor)	−40 to 185 °F (−40 to 85 °C), 0–100 % humidity
Probe cable	16 ft (5 m) and longer
Screen	1.8-inch color
Switches	2 relays for heaters, fans, coolers or garage doors
Connects by	Wi-Fi; Bluetooth for setup
Cases	Indoor, outdoor, and screenless; wall mount
In the box	[to be added: monitor, power supply, probe, mounting]